


c Technische Daten:		c Technical specification:	
Bemessungsspannung:	10 - 230 V AC/DC	Rated voltage:	10 - 230 V AC/DC
Strombelastbarkeit:	8 A bei 40°C	Current rating:	8 A at 40°C
Schutzart:	IP 67, im gesteckten Zustand	Degree of protection:	IP 67, in mated condition
Umgebungstemperatur Stecker:	-40°C ... +85°C	Temperature range connector:	-40°C ... +85°C
Umgebungstemperatur Leitung:	fest: -40°C ... +80°C bewegt: -25°C ... +80°C	Temperature range wire:	fixed: -40°C ... +80°C moved: -25°C ... +80°C
Steckzyklen:	> 100	Mating cycles:	> 100
Anschlussquerschnitt:	0,75mm <sup>2</sup> / AWG 18	Wire cross section:	0,75mm <sup>2</sup> / AWG 18
Gehäuse:	Deutsch DT04-2P-E004, schwarz	Housing:	Deutsch DT04-2P-E004, black
<b>Werkstoffe:</b>		<b>Materials:</b>	
Kontakt:	CuZn	Contact:	CuZn
Kontaktoberfläche:	Ni	Contact plating:	Ni
Kontaktträger:	Thermoplast	Contact carrier:	Thermoplastic
Umspritzung:	TPU, UL94, transluzent	Overmolding:	TPU, UL94, translucent


iso Ansicht ( 1,5 : 1 )

b Kontaktbelegung / Schematic diagram



c "D" = siehe Datenblatt Kabel  
"D" = see data sheet cable

Art.Nr.:	Beschreibung / Description	Kabellänge / cable length "L"	Kabel / cable
55-00451	DT04-2PG-AK1/0.75/ 2m	2,0m	PUR,
55-00452	DT04-2PG-AK1/0.75/ 5m	5,0m	schwarz, black
55-00453	DT04-2PG-AK1/0.75/10m	10,0m	2x0,75mm <sup>2</sup> ,
55-XXXXX	DT04-2PG-AK1/0.75/...m	...m	Kabel / cable: 781-K17200

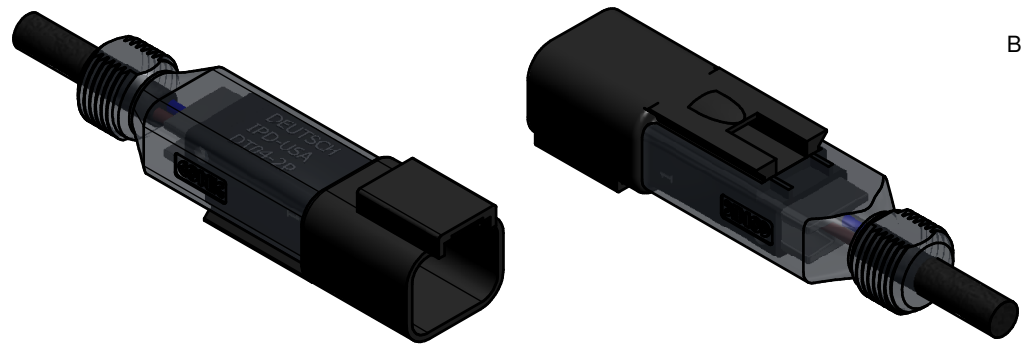

RoHS compliant

THIS DRAWING MAY NOT BE COPIED OR REPRODUCED IN ANY WAY, AND MAY NOT BE PASSED ON TO A THIRD PARTY WITHOUT WRITTEN PERMISSION. OWNERSHIP AND COPYRIGHT OF CONEC GmbH	Kabeltoleranz / cable tolerance:			scale: 1,5:1 c	
	L ≤ 4m: L + 40mm				material: see notes
	L > 4m: L + 1%			title: <b>DT 04 - 2pos Receptacle b</b> Valve Connector / with thread M12x1 DT 04 - 2pol Ventilstecker / mit Gewinde M12x1	
	5 x c	Ä5559	06.03.2015		K.H.
	2 x b	Ä 5291	29.07.2014		Lehm.
a	Original			dwg no: 55K1A054	DIN-A3
rev.	description	date	name	part no: see table	

